


SACE Tmax XT


FC Cu - Terminali anteriori per cavi in rame XT1-XT2-XT3-XT4
FC Cu - Front terminals for copper cables XT1-XT2-XT3-XT4
FC Cu - Vorderseitige Anschlüsse für Kabel aus Kupfer XT1-XT2-XT3-XT4
FC Cu - Prises avant pour câbles en cuivre XT1-XT2-XT3-XT4
FC Cu - Terminales frontales para cables de cobre XT1-XT2-XT3-XT4
FC Cu - 铜电缆前接线端子XT1-XT2-XT3-XT4

XT1-XT2-XT3-XT4

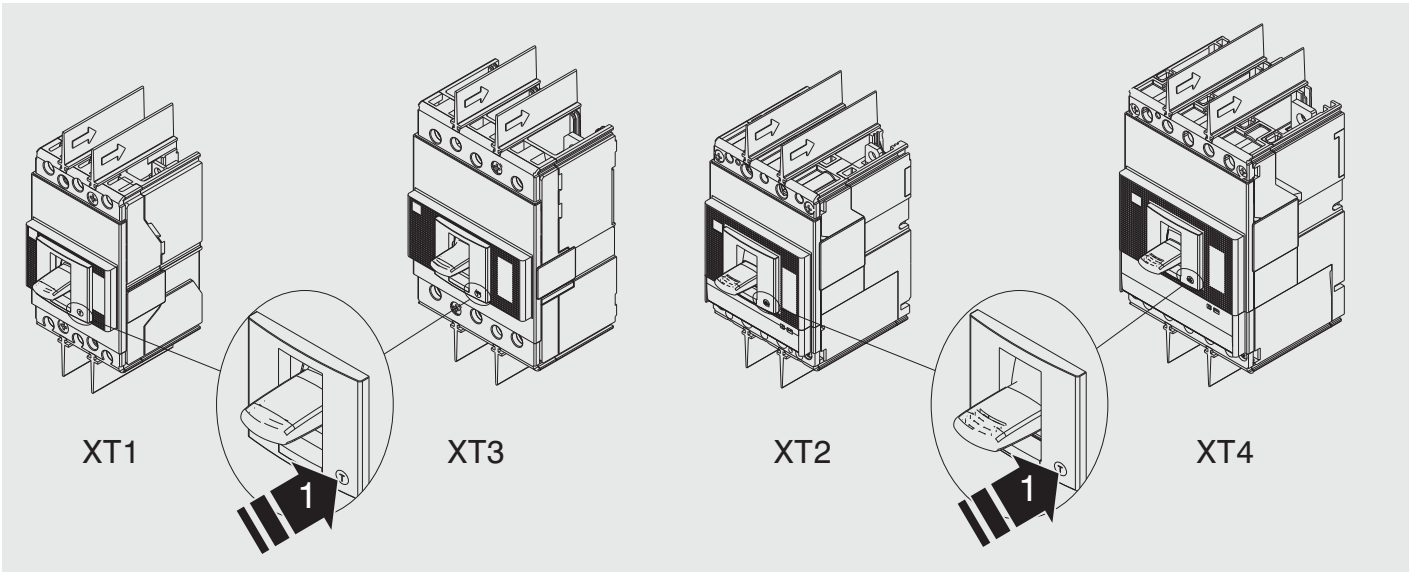


F-P-W										P-W ONLY	
											
XT1 MCCB	III	/	3(6)	3(6)	/	/	/	/	2(4)	1(2)	/
	IV	/	4(8)	4(8)	/	/	/	/	2(4)	/	1(2)
XT1 MCCB MCP	III	3(6)	/	3(6)	/	/	3(6)	3(6)	/	/	/
	IV	/	4(8)	/	4(8)	/	/	/	2(4)	/	1(2)
XT2	III	/	3(6)	/	3(6)	/	/	/	2(4)	1(2)	/
	IV	/	4(8)	/	4(8)	/	/	/	2(4)	/	1(2)
XT3	III	/	3(6)	/	/	3(6)	/	/	2(4)	1(2)	/
	IV	/	4(8)	/	/	4(8)	/	/	2(4)	/	1(2)
XT4	III	/	3(6)	/	3(6)	/	/	/	2(4)	1(2)	/
	IV	/	4(8)	/	4(8)	/	/	/	2(4)	/	1(2)

A ONLY FOR XT1 - XT3 F

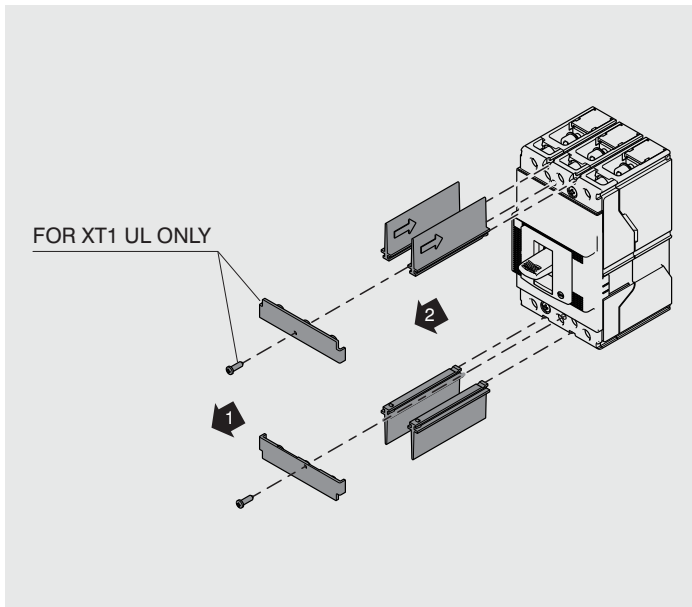

B ONLY FOR XT2 - XT4 F

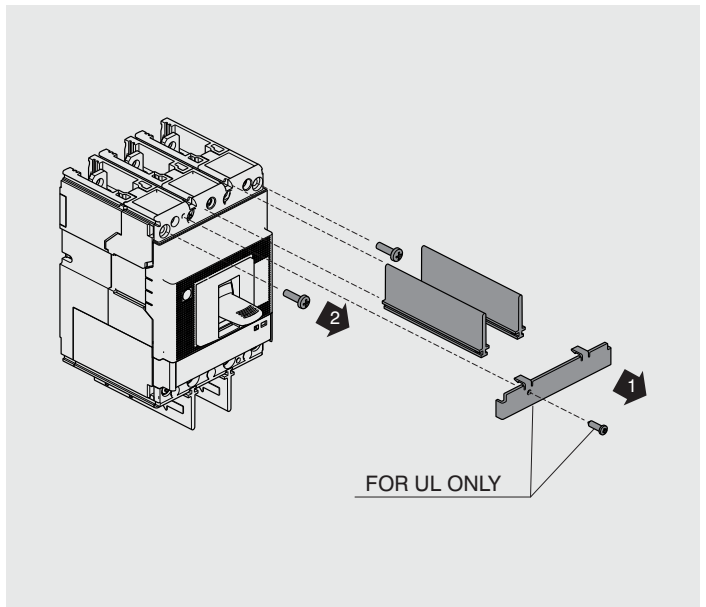

C XT1 MCCB

	Cu Stranded	Cu Flexible	
MAX	70 mm ²	MAX 50 mm ²	2,5 mm ² ...70 mm ² = 7 Nm / 62 lb in
MIN	2,5 mm ²	MIN 2,5 mm ²	
MAX	1/0 AWG	1/0 AWG	14 AWG...1/0 AWG = 7 Nm / 62 lb in
MIN	14 AWG	14 AWG	

D XT1 MCCB - MCP - MA

OK!

NO!

	Cu Stranded	Cu Flexible	
MAX	70 mm ²	MAX 50 mm ²	2,5 mm ² ...70 mm ² = 7 Nm / 62 lb in
MIN	1,5 mm ²	MIN 2,5 mm ²	
MAX	1/0 AWG	1/0 AWG	14 AWG...1/0 AWG = 7 Nm / 62 lb in
MIN	14 AWG	14 AWG	

E

XT2 - XT3 - XT4


	Cu Stranded	Cu Flexible	
XT2	MAX 95 mm ² MIN 1 mm ²	MAX 70 mm ² MIN 4 mm ²	≤ 50 mm ² = 7 Nm / 62 lb in > 50 - 95 mm ² = 8,5 Nm / 75 lb in
XT3	MAX 185 mm ² MIN 6 mm ²	MAX 150 mm ² MIN 6 mm ²	6 mm ² ...185 mm ² = 14 Nm / 124 lb in
XT4	MAX 1/0 AWG MIN 14 AWG	MAX 1/0 AWG MIN 14 AWG	14 AWG...1/0 AWG = 7 Nm / 62 lb in
XT3	MAX 250 Kcmil MIN 10 AWG	MAX 250 Kcmil MIN 10 AWG	10 AWG...250 Kcmil = 14 Nm / 124 lb in

Dimensions: XT2 Ø max 14, Ø max 0.55"; XT3 Ø max 18, Ø max 0.71"; XT4 Ø max 18, Ø max 0.71".

IEC, UL logos.

F

XT1 - XT2 - XT3 - XT4 F

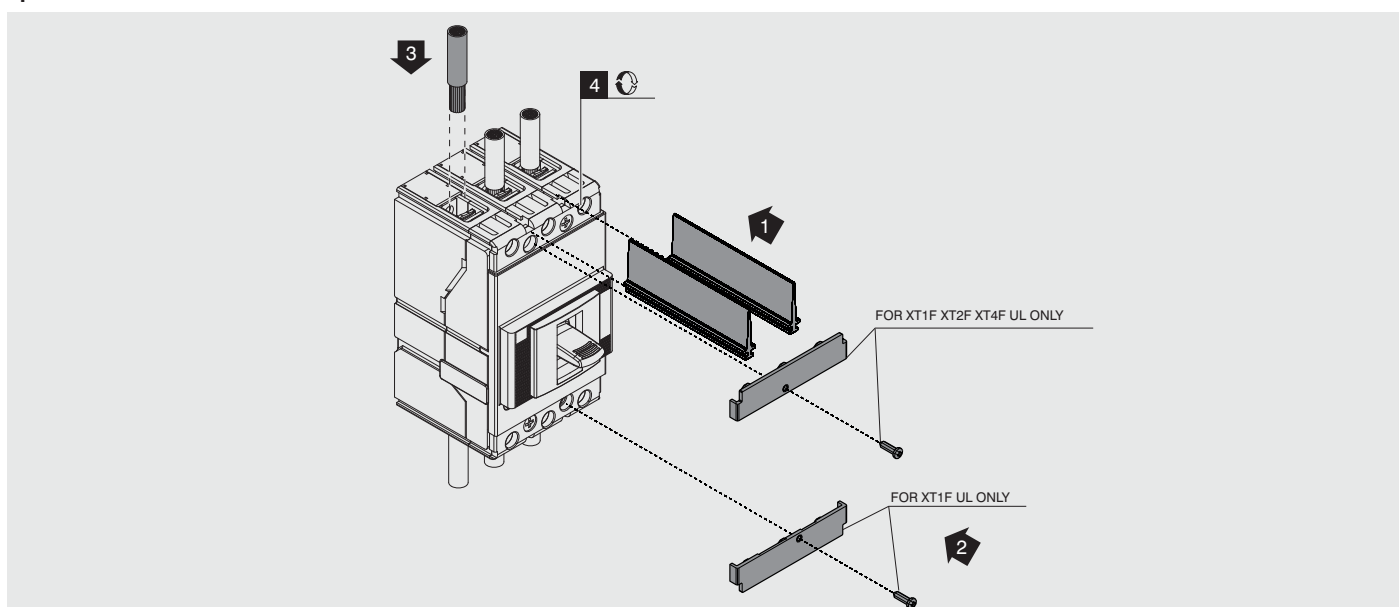


G

XT1 - XT2 - XT3 - XT4 P-W

IEC, UL logos.

Only XT2 UL Listed

Per l'installazione fare riferimento a interruttore fisso
For installation refer to fixed circuit-breaker
Für die Installation zu festen Leistungsschalter beziehen
Pour l'installation reporter à le disjoncteur fixe
Para la instalación consulte el interruptor fijo

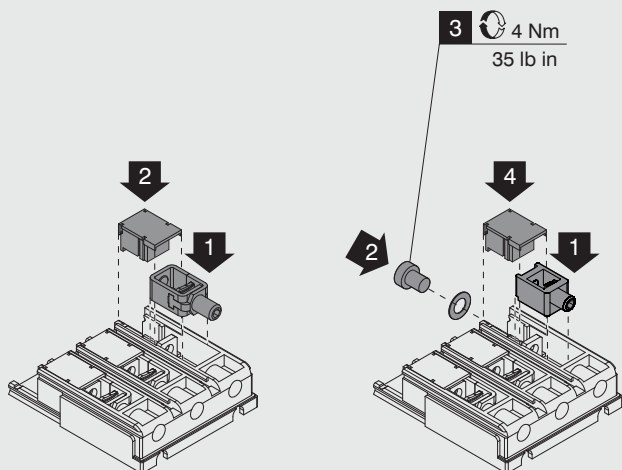


MCCB

MCCB - MCP

Per l'installazione fare riferimento a interruttore fisso
 For installation refer to fixed circuit-breaker
 Für die Installation zu festen Leistungsschalter beziehen
 Pour l'installation reporter à le disjoncteur fixe
 Para la instalación consulte el interruptor fijo


Only XT2 UL Listed

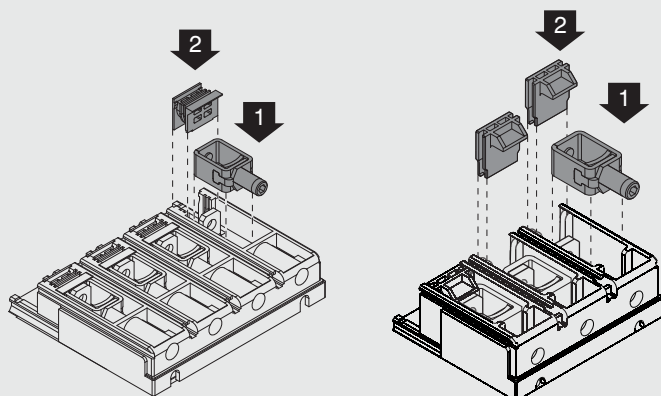

XT2 - XT4

XT3

Per l'installazione fare riferimento a interruttore fisso
 For installation refer to fixed circuit-breaker
 Für die Installation zu festen Leistungsschalter beziehen
 Pour l'installation reporter à le disjoncteur fixe
 Para la instalación consulte el interruptor fijo

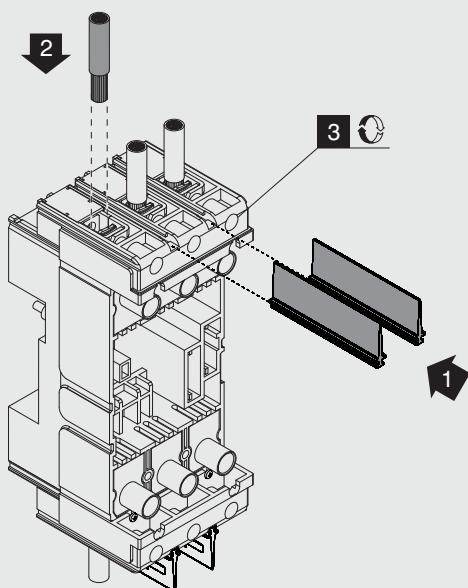

Per l'installazione fare riferimento a interruttore fisso
 For installation refer to fixed circuit-breaker
 Für die Installation zu festen Leistungsschalter beziehen
 Pour l'installation reporter à le disjoncteur fixe
 Para la instalación consulte el interruptor fijo