SIEMENS

Data sheet 3RM1207-1AA04



Reversing starter, 3RM1, 500 V, 0.55 - 3 kW, 1.6 - 7 A, 24 V DC, screw terminals

product brand name	SIRIUS
product category	Motor starter
product designation	Reversing starter
design of the product	with electronic overload protection
product type designation	3RM1
General technical data	
equipment variant according to IEC 60947-4-2	3
product function	Reversing starter
 intrinsic device protection 	Yes
 for power supply reverse polarity protection 	No
suitability for operation device connector 3ZY12	Yes
power loss [W] for rated value of the current	
 at AC in hot operating state per pole 	1.13 W
without load current share typical	1.68 W
insulation voltage rated value	500 V
overvoltage category	III
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation	
 between main and auxiliary circuit 	500 V
 between control and auxiliary circuit 	250 V
shock resistance	6g / 11 ms
vibration resistance	1 6 Hz, 15 mm; 20 m/s², 500 Hz
operating frequency maximum	1 1/s
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	03/01/2017
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 2-methyl-1-(4-methylthiophenyl)-2-morpholinopropan-1-one - 71868-10-5
Weight	0.327 kg
product function	
direct start	No
reverse starting	Yes
product function short circuit protection	No
Electromagnetic compatibility	
EMC emitted interference according to IEC 60947-1	class A
EMC immunity according to IEC 60947-1	Class A
conducted interference	
 due to burst according to IEC 61000-4-4 	3 kV / 5 kHz
 due to conductor-earth surge according to IEC 61000-4-5 	2 kV
 due to conductor-conductor surge according to IEC 61000-4-5 	1 kV

 due to high-frequency radiation according to IEC 61000- 4-6 	10 V
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge
conducted HF interference emissions according to CISPR11	Class B for the domestic, business and commercial environments
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments
Electrical Safety	
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe
Main circuit	
number of poles for main current circuit	3
design of the switching contact	Hybrid
design of the switching contact as NO contact for signaling function	OUT, electronic, 24 V DC, 15 mA
adjustable current response value current of the current-	1.6 7 A
dependent overload release	
minimum load [%]	20 %; from set rated current
type of the motor protection	solid-state
operating voltage rated value	48 500 V
relative symmetrical tolerance of the operating voltage	10 %
operating frequency 1 rated value	50 Hz
operating frequency 2 rated value	60 Hz
relative symmetrical tolerance of the operating frequency	10 %
operational current	
• at AC at 400 V rated value	7 A
• at AC-3 at 400 V rated value	7 A
 at AC-53a at 400 V at ambient temperature 40 °C rated value 	7 A
ampacity when starting maximum	56 A
operating power for 3-phase motors at 400 V at 50 Hz	0.55 3 kW
derating temperature	40 °C
Inputs/ Outputs	
input voltage at digital input	
at DC rated value	24 V
- with signal 40x st DO	0 5 V
with signal <0> at DC	
with signal <0> at DCfor signal <1> at DC	15 30
· ·	15 30
• for signal <1> at DC	15 30 11 mA
for signal <1> at DC input current at digital input	
for signal <1> at DC input current at digital input for signal <1> at DC	11 mA
for signal <1> at DC input current at digital input for signal <1> at DC with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V	11 mA 1 mA
for signal <1> at DC input current at digital input for signal <1> at DC with signal <0> at DC number of CO contacts for auxiliary contacts	11 mA 1 mA 1
for signal <1> at DC input current at digital input for signal <1> at DC with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum	11 mA 1 mA 1 3 A
for signal <1> at DC input current at digital input for signal <1> at DC with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V	11 mA 1 mA 1 3 A
for signal <1> at DC input current at digital input for signal <1> at DC with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum	11 mA 1 mA 1 3 A
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control	11 mA 1 mA 1 3 A
for signal <1> at DC input current at digital input for signal <1> at DC with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage	11 mA 1 mA 1 3 A 1 A
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V
for signal <1> at DC input current at digital input for signal <1> at DC with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 %
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 %
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 %
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V
for signal <1> at DC input current at digital input for signal <1> at DC with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC initial value initial value full-scale value	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value control current at DC • in standby mode of operation	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8 1.25
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value control current at DC • in standby mode of operation • during operation	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8 1.25 25 mA
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value control current at DC • in standby mode of operation	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8 1.25 25 mA 70 mA
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value control current at DC • in standby mode of operation • during operation inrush current peak	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8 1.25
for signal <1> at DC input current at digital input • for signal <1> at DC • with signal <0> at DC • with signal <0> at DC number of CO contacts for auxiliary contacts operational current of auxiliary contacts at AC-15 at 230 V maximum operational current of auxiliary contacts at DC-13 at 24 V maximum Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value relative negative tolerance of the control supply voltage at DC relative positive tolerance of the control supply voltage at DC control supply voltage 1 at DC rated value operating range factor control supply voltage rated value at DC • initial value • full-scale value control current at DC • in standby mode of operation • during operation inrush current peak • at 24 V	11 mA 1 mA 1 3 A 1 A DC 19.2 30 V 20 % 25 % 24 V 0.8 1.25 25 mA 70 mA 0.28 A; values at 25 °C

duration of inrush current peak	
• at 24 V	85 ms
• at DC at 24 V	80 ms
 at DC at 24 V at switching on of motor 	80 ms
power loss [W] in auxiliary and control circuit	
in switching state OFF	
— with bypass circuit	0.6 W
in switching state ON	
— with bypass circuit	1.68 W
Response times	
ON-delay time	60 90 ms
OFF-delay time	60 90 ms
Power Electronics	
operational current	
at 40 °C rated value	7 A
at 50 °C rated value	6.1 A
at 55 °C rated value	5.2 A
at 60 °C rated value	4.6 A
Installation/ mounting/ dimensions	
mounting position	vertical, horizontal, standing (observe derating)
fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	100 mm
width	22.5 mm
depth	141.6 mm
required spacing	141.0 (((()))
with side-by-side mounting	
— forwards	0 mm
— backwards	0 mm
	50 mm
— upwards — downwards	50 mm
— downwards — at the side	0 mm
	O IIIIII
• for grounded parts	0
— forwards	0 mm
— backwards	0 mm
— upwards	50 mm
— at the side	3.5 mm
— downwards	50 mm
Ambient conditions	
installation altitude at height above sea level maximum	4 000 m; For derating see manual
ambient temperature	
during operation	-25 +60 °C
during storage	-40 +70 °C
during transport	-40 +70 °C
environmental category during operation according to IEC 60721	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
relative humidity during operation	10 95 %
air pressure according to SN 31205	900 1 060 hPa
Communication/ Protocol	
protocol is supported	
PROFINET IO protocol	No
PROFIsafe protocol	No .
product function bus communication	No
protocol is supported AS-Interface protocol	No
Connections/ Terminals	
type of electrical connection	screw-type terminals for main circuit, screw-type terminals for control circuit
for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
wire length for motor unshielded maximum	100 m
type of connectable conductor cross-sections for main contacts	
• solid	1x (0,5 4 mm²), 2x (0,5 2,5 mm²)
 finely stranded with core end processing 	1x (0,5 4 mm²), 2x (0,5 1,5 mm²)

connectable conductor cross-section for main contacts	
 solid or stranded 	0.5 4 mm²
 finely stranded with core end processing 	0.5 4 mm²
connectable conductor cross-section for auxiliary contacts	
 solid or stranded 	0.5 2.5 mm²
 finely stranded with core end processing 	0.5 2.5 mm²
type of connectable conductor cross-sections	
 for auxiliary contacts 	
— solid	1x (0,5 2,5 mm²), 2x (1,0 1,5 mm²)
 finely stranded with core end processing 	1x (0.5 2.5 mm²), 2x (0.5 1 mm²)
 for AWG cables for auxiliary contacts 	1x (20 14), 2x (18 16)
AWG number as coded connectable conductor cross section	
• for main contacts	20 12
 for auxiliary contacts 	20 14
UL/CSA ratings	
yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 110/120 V rated value	0.25 hp
— at 230 V rated value	0.5 hp
• for 3-phase AC motor	
— at 200/208 V rated value	1 hp
 at 220/230 V rated value 	1.5 hp

Approvals Certificates **General Product Approval**

- at 460/480 V rated value

operational current at AC at 480 V according to UL 508







Confirmation





EMV Railway **Test Certificates** other **Environment**

3 hp

6.1 A



Type Test Certificates/Test Report

Confirmation

Special Test Certific-<u>ate</u>

Environmental Confirmations

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

all.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1207-1AA04

Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RM1207-1AA04}$


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RM1207-1AA04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1207-1AA04&lang=en




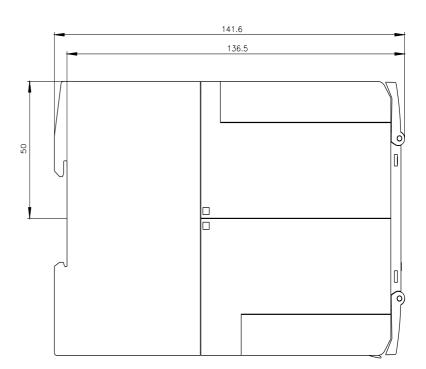

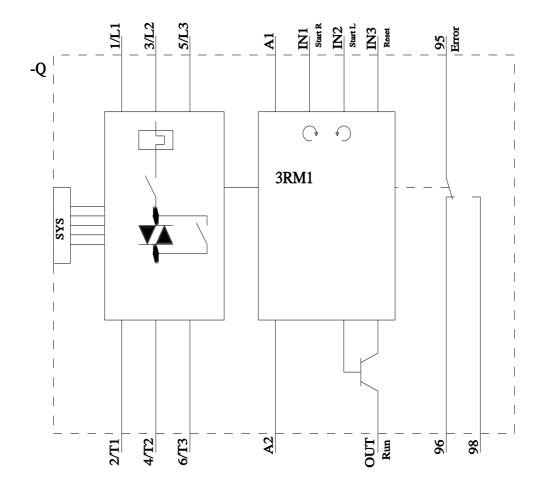







last modified: 3/11/2024 🖸