



Miniature circuit breaker 400 V 6kA, 3-pole, B, 63 A

| Model   |  |
|---|--|
| product brand name  | SENTRON  |
| product designation   | Miniature circuit breaker  |
| General technical data  |  |
| number of poles   | 3  |
| design of pole  | 3P   |
| tripping characteristic class   | B  |
| mechanical service life (operating cycles)  |  |
| • typical   | 10 000   |
| overvoltage category  | III  |
| degree of pollution   | 2  |
| Voltage   |  |
| type of voltage of the operating voltage  | AC   |
| type of voltage   | Use only in alternating current or direct current circuits. Mixed use is not permitted.                    |
| insulation voltage (Ui)   |  |
| • with multi-phase operation at AC rated value                                      | 440 V  |
| operational current   |  |
| • at 30 °C rated value  | 63 A   |
| • at 40 °C rated value  | 59.18 A  |
| • at 55 °C rated value  | 52.93 A  |
| • at AC rated value   | 63 A   |
| Supply voltage  |  |
| supply voltage at AC  | 400 V  |
| value range of the supply voltage frequency   | 50/60 Hz   |
| operating voltage   |  |
| • with multi-phase operation at AC maximum  | 440 V  |
| • at DC rated value maximum   | 62.5 V   |
| •   | The operational voltage 62,5V DC/pole takes into account a battery charging voltage with peak value of 72V |
| Protection class  |  |
| protection class IP   | IP20, with connected conductors  |
| Breaking Capacity   |  |
| switching capacity current  |  |
| • according to EN 60898 rated value   | 6 kA   |
| • according to IEC 60947-2 rated value  | 6 kA   |
| energy limitation class   | 3  |
| Dissipation   |  |
| power loss [W] for rated value of the current at AC in hot operating state per pole | 5.3 W  |
| suitability for operation   | Residential buildings/infrastructure   |

| Product details                                     |     |
|---|-----|
| product feature touch protection                    | Yes |
| product component neutral conductor switching       | No  |
| product feature                                     |     |
| • halogen-free                                      | Yes |
| • sealable  | Yes |
| • silicon-free                                      | Yes |
| product extension installable supplementary devices | Yes |

| Connections  |                      |
|--|----------------------|
| connectable conductor cross-section solid                                    |                      |
| • minimum  | 0.75 mm <sup>2</sup> |
| • maximum  | 25 mm <sup>2</sup>   |
| connectable conductor cross-section stranded                                 |                      |
| • minimum  | 0.75 mm <sup>2</sup> |
| • maximum  | 25 mm <sup>2</sup>   |
| connectable conductor cross-section finely stranded with core end processing |                      |
| • minimum  | 0.75 mm <sup>2</sup> |
| • maximum  | 25 mm <sup>2</sup>   |
| tightening torque with screw-type terminals                                  |                      |
| • minimum  | 2.5 N·m              |
| • maximum  | 3 N·m                |

| Mechanical Design             |       |
|-------------------------------|-------|
| height                        | 90 mm |
| width                         | 54 mm |
| depth                         | 76 mm |
| installation depth            | 70 mm |
| number of modular width units | 3     |
| mounting position             | any   |
| net weight                    | 486 g |

| Environmental conditions             |        |
|--------------------------------------|--------|
| ambient temperature during operation |        |
| • minimum                            | -25 °C |
| • maximum                            | 45 °C  |
| ambient temperature during storage   |        |
| • minimum                            | -40 °C |
| • maximum                            | 75 °C  |

| Approvals Certificates   |  |
|--------------------------|--|
| General Product Approval |  |





[Confirmation](#)



| other                         | Environment                                 |
|-------------------------------|---|
| <a href="#">Miscellaneous</a> | <a href="#">Confirmation</a>                |
|                               | <a href="#">Environmental Confirmations</a> |
|                               | <a href="#">Environmental Confirmations</a> |

| Further information   |
|---|
| Information on the packaging<br><a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a><br>Information- and Downloadcenter (Catalogs, Brochures,...)<br><a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a><br>Industry Mall (Online ordering system)<br><a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL6363-6">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SL6363-6</a><br>Service&Support (Manuals, Certificates, Characteristics, FAQs,...)<br><a href="https://support.industry.siemens.com/cs/ww/en/ps/5SL6363-6">https://support.industry.siemens.com/cs/ww/en/ps/5SL6363-6</a><br>Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)<br><a href="http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL6363-6">http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL6363-6</a> |

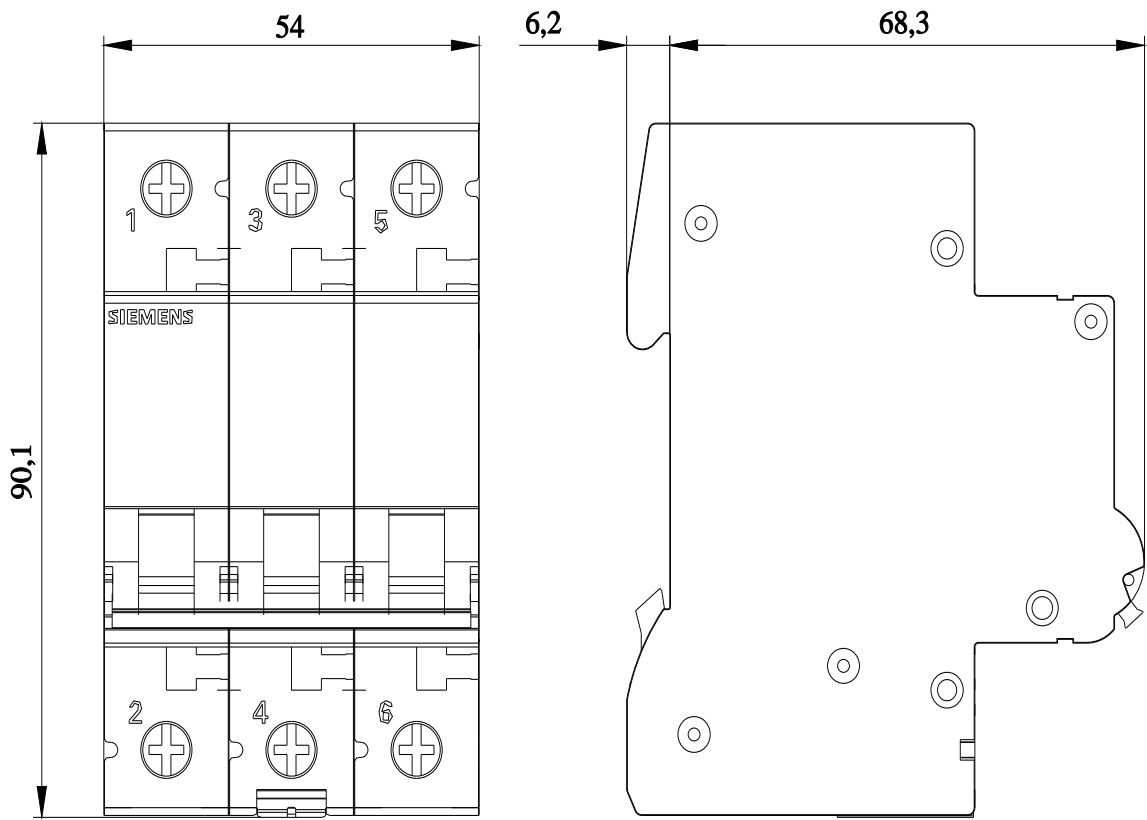

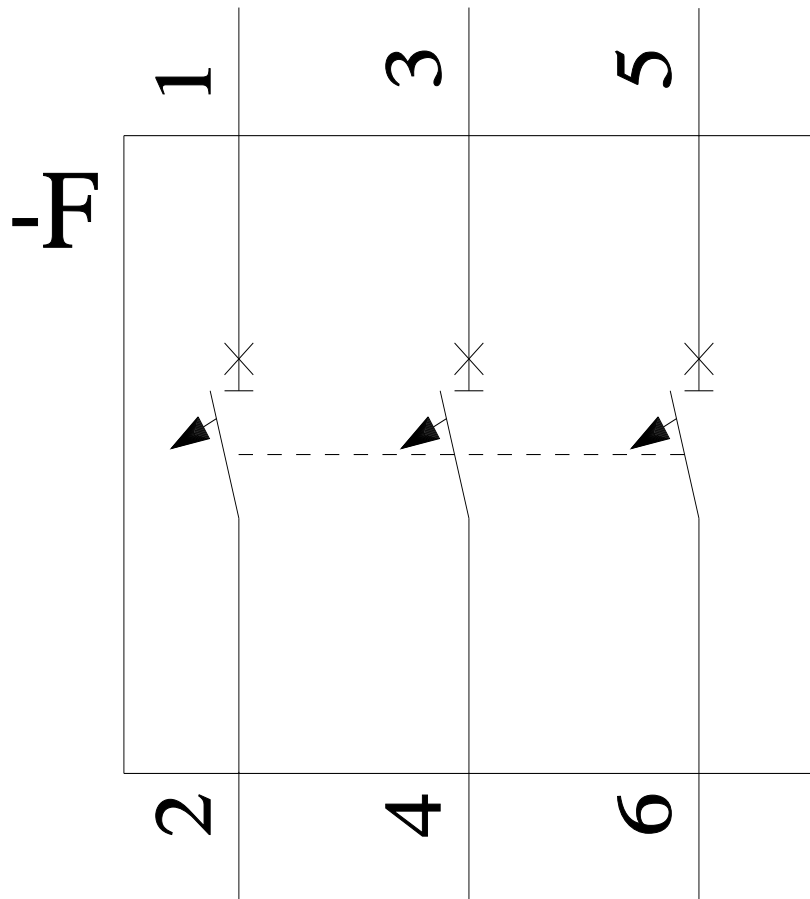

last modified:

9/3/2024 [↗](#)

