



SETRON, Fuse switch disconnecter 3NP1, 3-pole, NH000 narrow, 125 A, for busbar systems 60 mm, box terminal, cable outlet downwards Cover level 32/60/70 mm

Model	
product designation	Fuse switch disconnecter
busbar design	busbar thickness 5 or 10 mm
design of the safety monitoring	Without
design of the load switch strip form	No
type of the driving mechanism motor drive	No
General technical data	
number of poles	3
type of device	for 60 mm busbar systems
size of disconnecting link	0
size of fuse link	NH000
let-through current with closed switch maximum	15 kA
mechanical service life (operating cycles) typical	2 000
I ² t value with closed switch maximum	150 kA ² .s
power factor	
• at AC-22 B	0.65
• at AC-23 B	0.45
fuse system	LV HRC fuse
degree of pollution	2
Voltage	
insulation voltage	
• rated value	800 V
• with degree of pollution 2 at AC rated value	800 V
power factor at AC-21 B	0.95
surge voltage resistance rated value	6 kV
operational current	
• at 35 °C rated value	125 A
• at 40 °C rated value	111 A
• at 45 °C rated value	95 A
• at 50 °C rated value	76 A
• at 55 °C rated value	51 A
• at AC-21 B at 240 V rated value	125 A
• at AC-21 B at 400 V rated value	125 A
• at AC-21 B at 500 V rated value	125 A
• at AC-21 B at 690 V rated value	80 A
• at AC-22 B at 240 V rated value	125 A
• at AC-22 B at 400 V rated value	125 A
• at AC-22 B at 500 V rated value	125 A
• at AC-23 B at 400 V rated value	63 A
• at AC-23 B at 240 V rated value	63 A

let-through current with high-speed activation maximum permissible	10 kA
operating voltage	
• at AC rated value maximum	690 V
Protection class	
protection class IP	
• with closed switch with cover or cable lug cover	IP30
• with closed switch without cover or cable lug cover	IP10
• open	IP10
Dissipation	
power loss [W]	
• with conventional rated thermal current without fuse per pole	4.6 W
• with conventional rated thermal current without fuse per device	13.8 W
• for rated value of the current at AC in hot operating state per pole	13.6 W
• of the fuse per fuse maximum	9 W
Main circuit	
operational current	
• rated value	125 A
Auxiliary circuit	
number of CO contacts for auxiliary contacts	0
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
Suitability	
suitability for use main switch	No
suitability for use switch disconnecter	Yes
suitability for use EMERGENCY OFF switch	No
suitability for use safety switch	Yes
suitability for use maintenance/repair switch	Yes
Product details	
product function phase failure monitoring	No
product component	
• undervoltage release	No
• undervoltage release with leading contact	No
product feature sealable	Yes
product extension auxiliary switch	Yes
product extension optional	
• locking capability	Yes
• phase failure monitoring	No
• fuse monitoring	No
• voltage trigger	No
• overvoltage protection monitoring	No
Product function	
product function overvoltage protection monitoring	No
Short circuit	
conditional short-circuit current (I_q)	
• at AC at 240 V with high-speed activation rated value	80 kA
• at AC at 500 V with high-speed activation rated value	80 kA
• at AC at 690 V with high-speed activation rated value	80 kA
• with closed switch at AC at 240 V rated value	80 kA
• with closed switch at AC at 500 V rated value	80 kA
• with closed switch at AC at 690 V rated value	80 kA
Connections	
arrangement of electrical connectors for main current circuit	other
connectable conductor cross-section for main contacts	
• solid or stranded minimum	1.5 mm ²
• solid or stranded maximum	50 mm ²
• finely stranded with core end processing minimum	1.5 mm ²
• finely stranded with core end processing maximum	35 mm ²

<ul style="list-style-type: none"> • stranded minimum • stranded maximum 	16 mm ² 50 mm ²
tightening torque with screw-type terminals	
<ul style="list-style-type: none"> • minimum • maximum 	4 N·m 5 N·m
type of connectable conductor cross-sections of the laminated conductors maximum	6 x (9 x 0.8) mm
type of connection technology	Box terminal

Mechanical Design	
height	208 mm
width	53 mm
width of the busbar	
<ul style="list-style-type: none"> • minimum • maximum 	12 mm 30 mm
depth	129 mm
fastening method	busbar
fastening method	
<ul style="list-style-type: none"> • floor mounting • rail mounting 	No Yes
mounting position	horizontal/vertical
busbar center-to-center spacing	60 mm
net weight	0.61 kg

Environmental conditions	
ambient temperature during operation	
<ul style="list-style-type: none"> • minimum • maximum 	-25 °C 70 °C
ambient temperature during storage	
<ul style="list-style-type: none"> • minimum • maximum 	-50 °C 80 °C

Certificates	
reference code according to IEC 81346-2	Q

Approvals Certificates	
General Product Approval	Test Certificates

[Confirmation](#)



[Miscellaneous](#)



[Type Test Certificates/Test Report](#)

other	Environment
--------------	--------------------

[Confirmation](#)

[Miscellaneous](#)

[Environmental Conformations](#)

[Environmental Conformations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NP1113-1BC20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NP1113-1BC20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP1113-1BC20

CAX-Online-Generator

<http://www.siemens.com/cax>


Tender specifications

<http://www.siemens.com/specifications>

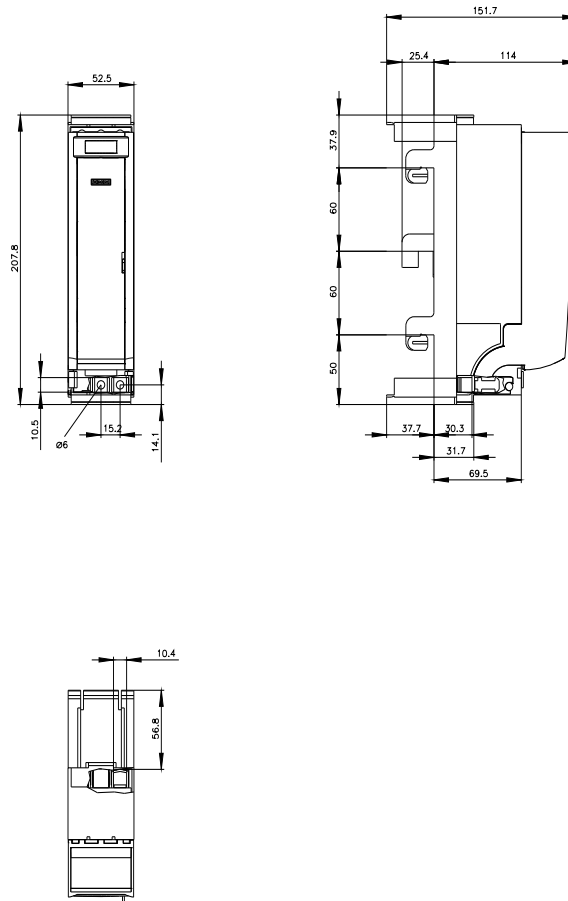



CB

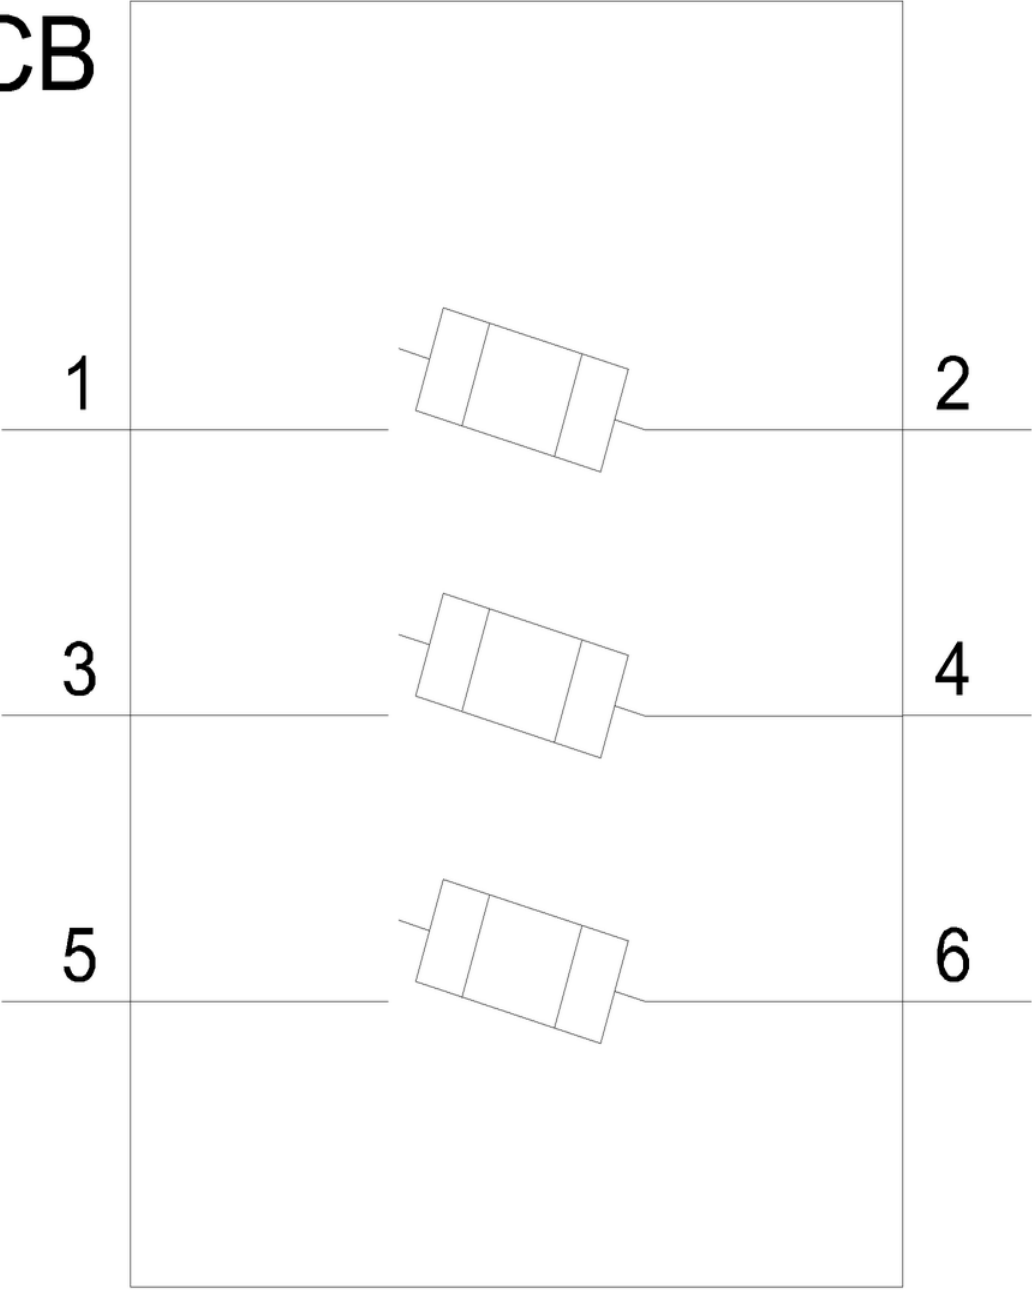

last modified:

9/28/2024 

