

Pin busbar, 10 mm<sup>2</sup> connection: 3x 3-phase touch-safe

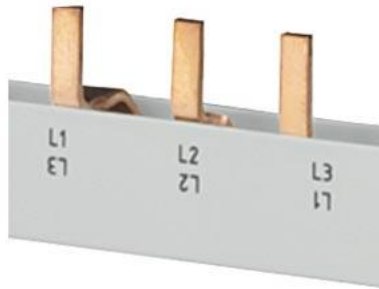


Figure similar

Model	
product brand name	SENTRON
product designation	Pin busbar
design of the product	10 mm <sup>2</sup> , 3 x 3PH
General technical data	
phase number	3
cross-section	10 mm <sup>2</sup>
Main circuit	
operational current rated value	63 A
Product details	
product feature insulated	Yes
Connections	
type of electrical connection	Pin
Mechanical Design	
width	9.5 mm
length	158 mm
net weight	55 g
Approvals Certificates	
General Product Approval	other



[Confirmation](#)

[Miscellaneous](#)



[Miscellaneous](#)

other	Environment
<a href="#">Confirmation</a>	<a href="#">Environmental Confirmations</a>
	<a href="#">Environmental Confirmations</a>

### Further information

- Information on the packaging  
<https://support.industry.siemens.com/cs/ww/en/view/109813875>
- Information- and Downloadcenter (Catalogs, Brochures,...)  
<http://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3614>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3614>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3614](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3614)


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

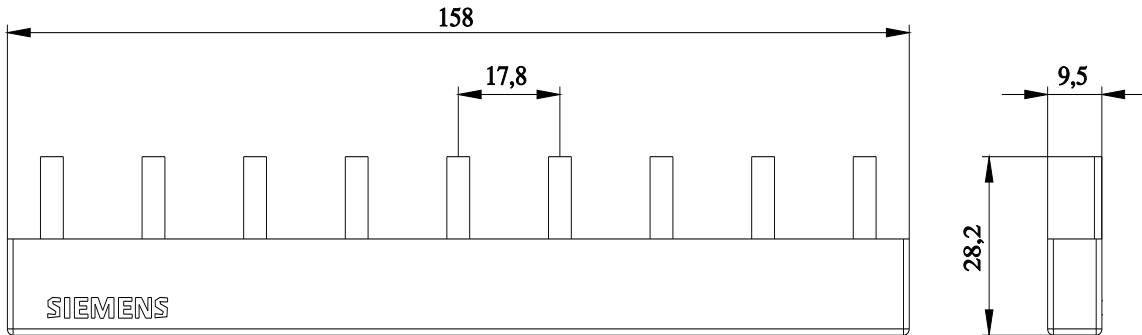



---

last modified:

7/5/2024 