



Timing relay, electronic Multifunction, 16 functions 2 change-over contacts 24 to 240 V AC/DC at 50/60 Hz AC 0.05 s to 100 h Overall width 45 mm screw terminal

| | |
|---|--|
| product brand name | SIRIUS |
| product designation | timing relay |
| design of the product | Multifunctional |
| product type designation | 3RP20 |
| General technical data | |
| product component | |
| • relay output | Yes |
| • semi-conductor output | No |
| product extension required remote control | No |
| product extension optional remote control | No |
| power loss [W] maximum | 2 W |
| insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value | 300 V |
| test voltage for isolation test | 2 kV |
| degree of pollution | 3 |
| surge voltage resistance rated value | 4 000 V |
| shock resistance according to IEC 60068-2-27 | 11g / 15 ms |
| vibration resistance according to IEC 60068-2-6 | 10 ... 55 Hz / 0.35 mm |
| mechanical service life (operating cycles) typical | 10 000 000 |
| electrical endurance (operating cycles) at AC-15 at 230 V typical | 100 000 |
| adjustable time | 0.05 s ... 100 h |
| relative setting accuracy relating to full-scale value | 5 %; +/- |
| thermal current | 5 A |
| minimum ON period | 35 ms |
| recovery time | 150 ms |
| reference code according to IEC 81346-2 | K |
| relative repeat accuracy | 1 %; +/- |
| influence of the surrounding temperature | ±5 % |
| power supply influence | ±1 % |
| Substance Prohibitance (Date) | 05/01/2012 |
| SVHC substance name | Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 |
| Weight | 0.13 kg |
| Control circuit/ Control | |
| type of voltage of the control supply voltage | AC/DC |
| control supply voltage 1 at AC | |
| • at 50 Hz | 24 ... 240 V |
| • at 60 Hz | 24 ... 240 V |
| control supply voltage frequency 1 | 50 ... 60 Hz |
| control supply voltage 1 at DC | 24 ... 240 V |

| | |
|--|---|
| operating range factor control supply voltage rated value at DC <ul style="list-style-type: none"> initial value full-scale value | 0.85 1.1 |
| operating range factor control supply voltage rated value at AC at 50 Hz <ul style="list-style-type: none"> initial value full-scale value | 0.8 1.1 |
| operating range factor control supply voltage rated value at AC at 60 Hz <ul style="list-style-type: none"> initial value full-scale value | 0.8 1.1 |
| Switching Function | |
| switching function <ul style="list-style-type: none"> ON-delay ON-delay/instantaneous contact passing make contact passing make contact/instantaneous contact OFF delay | Yes Yes Yes Yes No |
| switching function <ul style="list-style-type: none"> flashing symmetrically with interval start/instantaneous flashing symmetrically with interval start flashing symmetrically with pulse start/instantaneous flashing symmetrically with pulse start flashing asymmetrically with interval start flashing asymmetrically with pulse start | Yes Yes No No No No |
| switching function <ul style="list-style-type: none"> star-delta circuit with delay time star-delta circuit | No Yes |
| switching function with control signal <ul style="list-style-type: none"> additive ON-delay passing break contact passing break contact/instantaneous OFF delay OFF delay/instantaneous pulse delayed pulse delayed/instantaneous pulse-shaping pulse-shaping/instantaneous additive ON-delay/instantaneous ON-delay/OFF-delay/instantaneous passing make contact passing make contact/instantaneous contact | Yes Yes Yes Yes Yes No No Yes Yes Yes Yes Yes No Yes |
| switching function of interval relay with control signal <ul style="list-style-type: none"> retrotriggerable with deactivated control signal/instantaneous contact retrotriggerable with switched-on control signal retrotriggerable with switched-on control signal/instantaneous contact retriggerable with deactivated control signal | No No No No |
| design of the control terminal non-floating | Yes |
| Short-circuit protection | |
| design of the fuse link for short-circuit protection of the auxiliary switch required | fuse gL/gG: 4 A |
| Auxiliary circuit | |
| material of switching contacts | AgSnO2 |
| number of NC contacts <ul style="list-style-type: none"> delayed switching instantaneous contact | 0 0 |
| number of NO contacts <ul style="list-style-type: none"> delayed switching instantaneous contact | 0 0 |

| | |
|---|--|
| number of CO contacts | |
| • delayed switching | 2 |
| • instantaneous contact | 0 |
| operational current of auxiliary contacts at AC-15 | |
| • at 24 V | 3 A |
| • at 250 V | 3 A |
| operational current of auxiliary contacts at DC-13 | |
| • at 24 V | 1 A |
| • at 125 V | 0.2 A |
| • at 250 V | 0.1 A |
| operating frequency with 3RT2 contactor maximum | 5 000 1/h |
| contact reliability of auxiliary contacts | one incorrect switching operation of 100 million switching operations (17 V, 5 mA) |
| contact rating of auxiliary contacts according to UL | R300 / B300 |
| Inputs/ Outputs | |
| product function | |
| • non-volatile | No |
| Electromagnetic compatibility | |
| EMC emitted interference according to IEC 61812-1 | EN 61000-6-4(3) |
| EMC immunity according to IEC 61812-1 | EN 61000-6-2 |
| conducted interference | |
| • due to burst according to IEC 61000-4-4 | 2 kV network connection / 1 kV control connection |
| • due to conductor-earth surge according to IEC 61000-4-5 | 2 kV |
| • due to conductor-conductor surge according to IEC 61000-4-5 | 1 kV |
| field-based interference according to IEC 61000-4-3 | 10 V/m |
| electrostatic discharge according to IEC 61000-4-2 | 4 kV contact discharge / 8 kV air discharge |
| Safety related data | |
| category according to EN 954-1 | none |
| Electrical Safety | |
| protection class IP on the front according to IEC 60529 | IP20 |
| touch protection on the front according to IEC 60529 | finger-safe, for vertical contact from the front |
| type of insulation | Basic insulation |
| Connections/ Terminals | |
| product component removable terminal for auxiliary and control circuit | No |
| type of electrical connection for auxiliary and control circuit | screw-type terminals |
| type of connectable conductor cross-sections | |
| • solid | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) |
| • finely stranded with core end processing | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) |
| • for AWG cables solid | 2x (18 ... 14) |
| • for AWG cables stranded | 2x (18 ... 14) |
| connectable conductor cross-section | |
| • solid | 0.5 ... 2.5 mm ² |
| • finely stranded with core end processing | 0.5 ... 2.5 mm ² |
| AWG number as coded connectable conductor cross section | |
| • solid | 18 ... 14 |
| • stranded | 18 ... 14 |
| tightening torque | 0.8 ... 1.2 N·m |
| design of the thread of the connection screw | M3 |
| Installation/ mounting/ dimensions | |
| mounting position | any |
| fastening method | screw and snap-on mounting onto 35 mm DIN rail |
| height | 57 mm |
| width | 45 mm |
| depth | 73 mm |
| required spacing | |
| • with side-by-side mounting | |
| — forwards | 0 mm |
| — backwards | 0 mm |
| — upwards | 0 mm |

| | |
|----------------------|------|
| — downwards | 0 mm |
| — at the side | 0 mm |
| • for grounded parts | |
| — forwards | 0 mm |
| — backwards | 0 mm |
| — upwards | 0 mm |
| — at the side | 0 mm |
| — downwards | 0 mm |
| • for live parts | |
| — forwards | 0 mm |
| — backwards | 0 mm |
| — upwards | 0 mm |
| — downwards | 0 mm |
| — at the side | 0 mm |

Ambient conditions

| | |
|---|----------------|
| installation altitude at height above sea level maximum | 2 000 m |
| ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -40 ... +85 °C |
| • during transport | -40 ... +85 °C |
| relative humidity during operation | 10 ... 95 % |

Approvals Certificates

General Product Approval



[Confirmation](#)



EMV

Test Certificates

Marine / Shipping



[KC](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping

other

Environment



[Confirmation](#)

[Environmental Confirmations](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2005-1BW30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP2005-1BW30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)




<https://support.industry.siemens.com/cs/ww/en/ps/3RP2005-1BW30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP2005-1BW30&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RP2005-1BW30/manual>

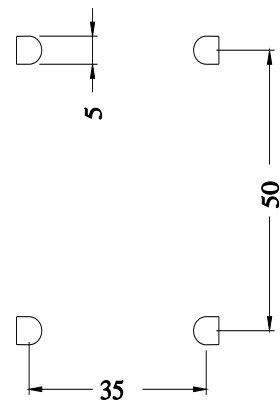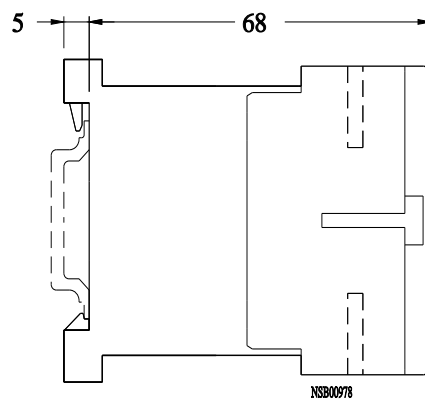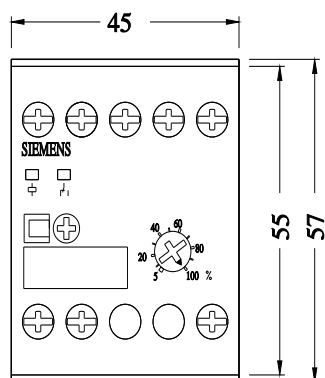

last modified:

4/9/2024 