



LV HRC fuse base Sz. 1, 3-pole 250 A 690 V flat terminal

Model			
product brand name		SETRON	
product designation		LV HRC fuse system	
design of the thread of the connection screw		M10	
design of the product		LV HRC fuse base	
General technical data			
number of poles		3	
size of fuse system according to EN 60269-1		NH1	
Supply voltage			
supply voltage			
• at AC		690 V	
• at DC		440 V	
Product details			
product component swivel-in mechanism		No	
maximum short-circuit current breaking capacity (Icu)			
• at AC rated value		120 kA	
• at DC rated value		25 kA	
Connections			
tightening torque with screw-type terminals maximum		38 N·m	
type of electrical connection		With flat-type terminal	
• for main current circuit		Flat-type terminal with nut	
Mechanical Design			
height		203 mm	
width		146 mm	
depth		84 mm	
fastening method		fixed mounting	
fastening method bus-mounting		No	
net weight		2 090 g	
Approvals Certificates			
General Product Approval		Marine / Shipping	other



[Confirmation](#)



[Miscellaneous](#)

other	Environment
-------	-------------

[Confirmation](#)

[Environmental Con-](#)

[Environmental Con-](#)

Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NH4230>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NH4230>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NH4230

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

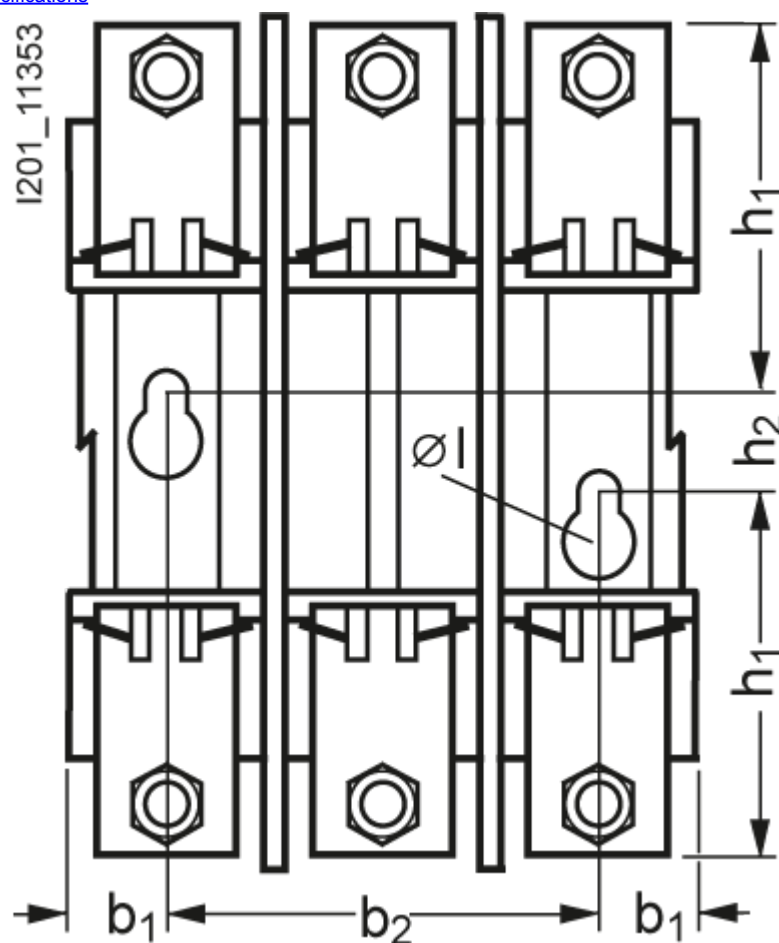

last modified:

12/19/2020

