



switch disconnecter 3VA1 IEC frame 250 3-pole SD100, In=250A without overload protection w/o short-circuit protection nut keeper kit

Model	
product brand name	SETRON
product designation	Molded case circuit breaker
design of the product	in MCCB design
number of poles	3
design of the auxiliary release	without
design of the auxiliary switch	Without
General technical data	
insulation voltage / rated value	800 V
operating voltage / at DC / rated value	500 V
operating voltage / at AC / rated value	690 V
power loss [W] / maximum	57 W
mechanical service life (operating cycles) / typical	15 000
product function / communication function	No
Net Weight	1.519 kg
Current	
operational current	
• at 40 °C	250 A
• at 45 °C	250 A
• at 50 °C	250 A
• at 55 °C	243 A
• at 60 °C	237 A
• at 65 °C	230 A
• at 70 °C	223 A
let-through I _{2t} value / at AC-23 B	
• at 400 V / maximum permissible	1 810 000 A ² ·s
• at 500 V / maximum permissible	1 660 000 A ² ·s
• at 690 V / maximum permissible	1 140 000 A ² ·s
let-through current (I _c) / at AC-23 B	
• at 400 V / maximum permissible	29 kA
• at 500 V / maximum permissible	18.7 kA
• at 690 V / maximum permissible	14.9 kA
Mechanical Design	
product component	
• undervoltage release	No
• voltage trigger	No
• undervoltage release with leading contact	No
• trip indicator	No
height	158 mm
width	105 mm

depth	70 mm
Connections	
arrangement of electrical connectors / for main current circuit	Front terminal
type of electrical connection / for main current circuit	busbar connection
design of the surface / of the connections / on the top of the switch (N, 1, 3, 5)	silver
design of the surface / of the connections / on the bottom of the switch (N, 2, 4, 6)	Silver
Auxiliary circuit	
number of CO contacts / for auxiliary contacts	0
Accessories	
product extension / optional / motor drive	Yes
Environmental conditions	
protection class IP / on the front	IP40
ambient temperature	
• during operation / minimum	-25 °C
• during operation / maximum	70 °C
• during storage / minimum	-40 °C
• during storage / maximum	80 °C
Environmental footprint	
Global Warming Potential [CO2 eq] / total	285.47 kg
Global Warming Potential [CO2 eq] / during manufacturing	6.87 kg
Global Warming Potential [CO2 eq] / during operation	279 kg
Global Warming Potential [CO2 eq] / after end of life	-0.78 kg
reference code / according to IEC 81346-2	Q
Approvals / Certificates	
General Product Approval	



[Confirmation](#)



[Miscellaneous](#)

General Product Approval	EMV	Test Certificates			Marine / Shipping
		Type Test Certificates/Test Report	Miscellaneous	Special Test Certificate	
Marine / Shipping				other	



[Miscellaneous](#)

[Confirmation](#)

other	Environment			
Miscellaneous		Environmental Confirmations	Environmental Confirmations	

Further information	
Information on the packaging	
https://support.industry.siemens.com/cs/ww/en/view/109813875	
Information- and Downloadcenter (Catalogs, Brochures,...)	
http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system)	
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA1225-1AA32-0AA0	

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3VA1225-1AA32-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA1225-1AA32-0AA0


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

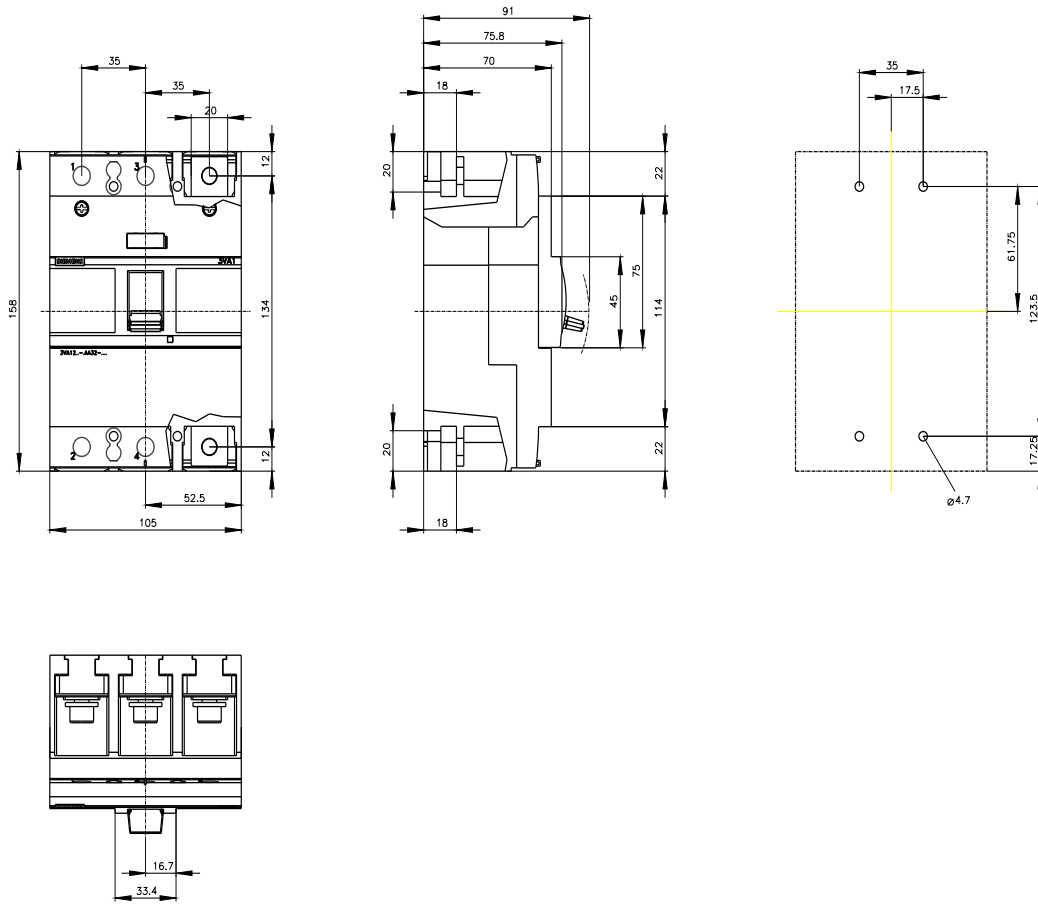

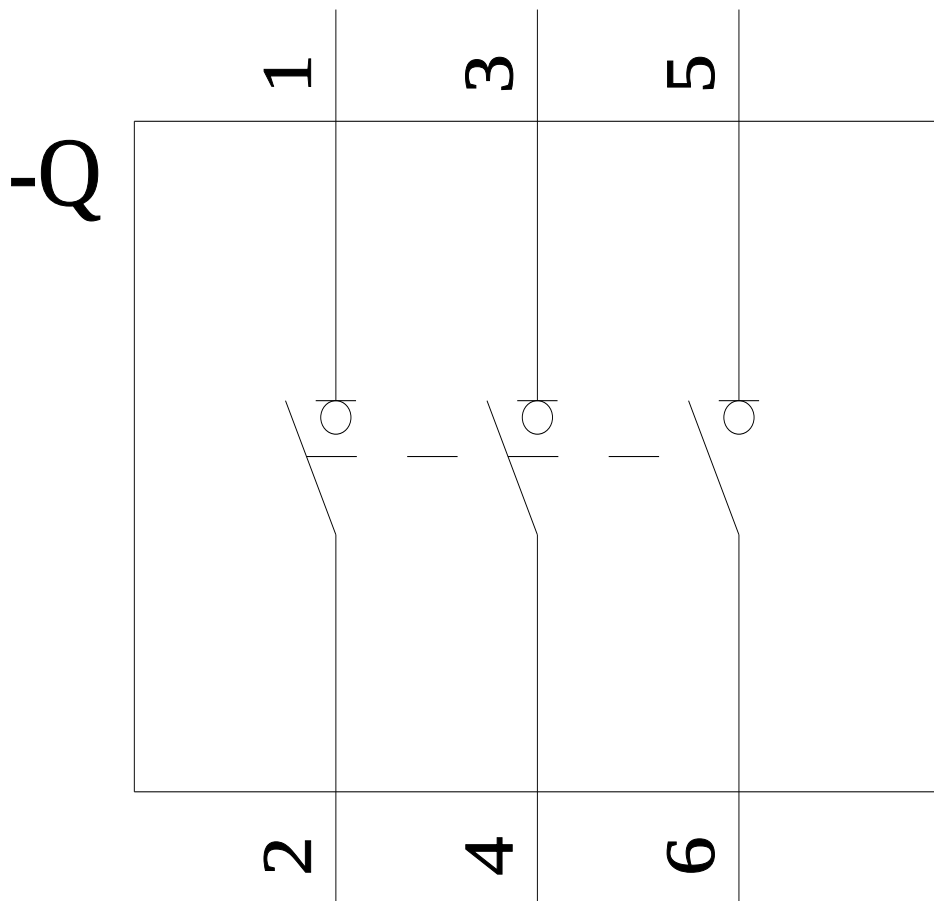

last modified:

10/23/2024 [↗](#)

