



Figure similar

RCBO, 6 kA, 1-pole+N, type AC, 30 mA, B char, In: 20 A, Un AC: 230 V, permitted in all countries. Observe national installation regulations!

Model	
product brand name	SENTRON
product designation	RCBO
design of the product	Instantaneous
General technical data	
number of poles	2
number of poles with protection	1
design of pole	1P+N
tripping characteristic class	B
mechanical service life (operating cycles) typical	10 000
overvoltage category	III
degree of pollution	2
Voltage	
type of voltage of the operating voltage	AC
insulation voltage (Ui) rated value	264 V
surge voltage resistance rated value	4 000 V
surge current resistance at (8/20) $\mu$ s	1 kA
tripping fault current rated value	30 mA
operational current	
• at 30 °C rated value	20 A
• at 40 °C rated value	18.8 A
• at 45 °C rated value	18.2 A
• at 50 °C rated value	17.4 A
• at 55 °C rated value	16.2 A
• at 60 °C rated value	16.2 A
• at 65 °C rated value	15.4 A
• at 70 °C rated value	14.6 A
• at AC rated value	20 A
residual current type	AC
Supply voltage	
supply voltage	
• at AC rated value	230/240 V
• for testing equipment minimum	195 V
operating frequency	50 Hz
supply voltage frequency rated value	50 Hz
Protection class	
protection class IP	IP20, if the distribution board is installed, with connected conductors
Breaking Capacity	
short-circuit current breaking capacity (Icn) according to	6 kA

<b>EN 61009-1 rated value</b>	
switching capacity current	
• according to EN 60898 rated value	6 kA
• according to IEC 60947-2 rated value	15 kA
<b>rated residual switching capacity (I<math>\Delta</math>m) according to IEC 61009-1</b>	6 kA
<b>energy limitation class</b>	3

#### Dissipation

<b>power loss [W]</b>	
• maximum	3.7 W

#### Product details

<b>product feature touch protection</b>	Yes
product component neutral conductor switching	Yes
<b>product feature</b>	
• halogen-free	Yes
• silicon-free	Yes

#### Connections

<b>connectable conductor cross-section solid</b>	
• minimum	0.75 mm <sup>2</sup>
• maximum	35 mm <sup>2</sup>
<b>connectable conductor cross-section stranded</b>	
• minimum	0.75 mm <sup>2</sup>
• maximum	35 mm <sup>2</sup>
<b>connectable conductor cross-section finely stranded with core end processing</b>	
• minimum	0.75 mm <sup>2</sup>
• maximum	25 mm <sup>2</sup>
<b>tightening torque with screw-type terminals</b>	
• minimum	2.5 N·m
• maximum	3 N·m
position of power supply cord	Either top or bottom

#### Mechanical Design

<b>height</b>	90 mm
<b>width</b>	36 mm
<b>depth</b>	77 mm
<b>installation depth</b>	70 mm
<b>number of modular width units</b>	2
<b>mounting position</b>	any
<b>net weight</b>	279 g
<b>weight with packaging</b>	279 g

#### Environmental conditions

<b>influence of the surrounding temperature</b>	Max. 95% humidity
<b>ambient temperature during operation</b>	
• minimum	-25 °C
• maximum	55 °C
<b>ambient temperature during storage</b>	
• minimum	-40 °C
• maximum	75 °C
<b>number of test cycles for environmental testing according to IEC 60068-2-30</b>	28

#### Approvals Certificates

General Product Approval



[Confirmation](#)



General Product Approval	EMV	Test Certificates	other
--------------------------	-----	-------------------	-------

[Miscellaneous](#)



[Special Test Certificate](#)

[Miscellaneous](#)

[Confirmation](#)

<b>other</b>	<b>Railway</b>	<b>Dangerous goods</b>	<b>Environment</b>
--------------	----------------	------------------------	--------------------

[Miscellaneous](#)

[Miscellaneous](#)

[Special Test Certificate](#)

[Confirmation](#)

[Transport Information](#)

[Environmental Confirmations](#)

#### Environment

[Environmental Confirmations](#)

#### Further information

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5SU1356-0KK20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5SU1356-0KK20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SU1356-0KK20](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SU1356-0KK20)

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

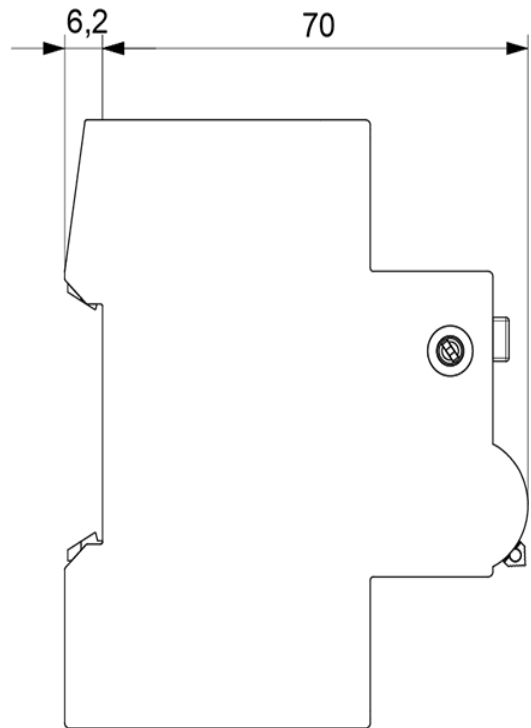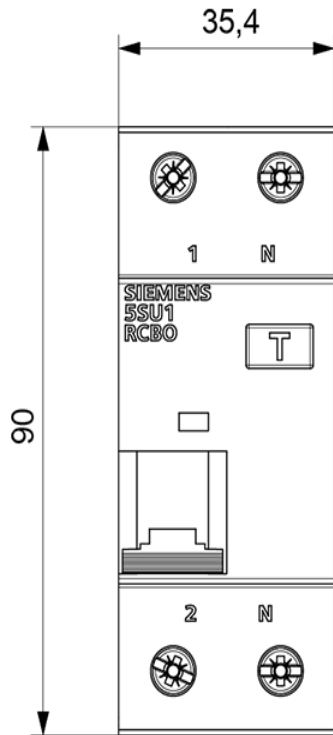

last modified:

3/12/2024 

