

LINEAR J STANDARD


Typology

Low voltage and mains supply halogen lamps.

Features

Excellent colour rendering, low cost, wide diffusion and easy to use.

In addition to energy classes that reflect the limitations of the technology used that is now totally replaceable by more efficient LED models.

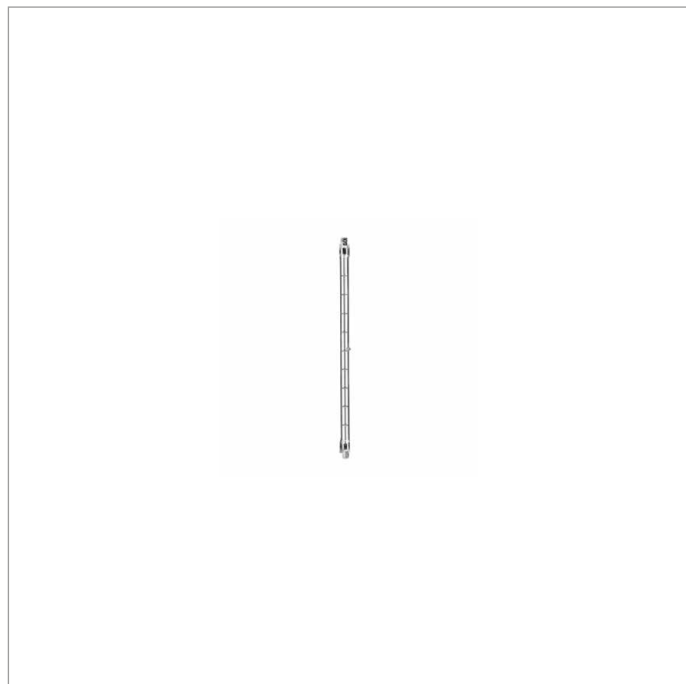

230 Vac

Ra 100



2000 h

IP20

R7s-15

-15°C
+35°C

320°

Characteristic data

Power	1500 W	Beam	320°	Dimmable	Yes	Input	230 Vac
Base	R7s-15	IP	20	Flux	29200 lm	Tc	3000 K
Ra	100						

Dimensional characteristics



L	254 mm
Ø	10 mm

Lighting and photometric features

Beam opening	320°
Flux	29200 lm
CCT nominal colour temperature	3000 K
Colour of the light	Warm light
Colour rendering index	100
Lifespan	2000 h
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

Electrical characteristics

Rated power	1500 W
Input voltage	230 Vac
undefined	50 Hz
Dimmable	Yes
Input current	6.52 A
Weighted energy consumption	1500 kWh/1000h
Energy class	C
Number of cycles	15000
Operating temperature	-15°C / +35°C
Equivalence with incandescent lamp	1702
Operating position	15°

Standards and Directives

2009/125/EC, 244/2009, 859/2009, 1194/2012, 2015/1428, 2010/30/EU, 874/2012, 2011/65/EU, 2012/19/EU, 2014/30/EU, 2014/35/EU, 2015/863	CEI EN 60432-2/A1:2006
CEI EN 55015:2020	CEI EN 60432-2/A2:2012
CEI EN 60432-2:2001	

Logistics data

Number of pieces multiple pack	25
Barcode multiple pack	8011905707194