



DFH TRIPHOSPHOR T5


Typology

Compact, circular and linear fluorescent lamps.

Features

The best fluorescent and triphosphorous powders for maximum light colour control and light emission over time, good colour rendering and the excellent luminous efficiency.

A wide reliable range for installation in professional contexts such and home environments.



Characteristic data

Power	21 W	Dimmable	Yes	Input	122,8 Vac	Base	G5
IP	20	Flux	1910 lm	Tc	3000 K	Ra	>80

Dimensional characteristics



L	849 mm
Ø	16 mm


Lighting and photometric features

Flux	1910 lm
CCT nominal colour temperature	3000 K
Colour of the light	Warm light
Colour rendering index	>80
Lifespan	24000 h
Mercury	3 mg
Luminous Flux Maintenance at 2000h	97
Luminous Flux Maintenance at 4000h	95
Luminous Flux Maintenance at 6000h	94
Luminous Flux Maintenance at 8000h	93
Luminous Flux Maintenance at 12000h	91
Luminous Flux Maintenance at 16000h	90
Luminous Flux Maintenance at 20000h	85
Lamp survival factor at 2000h	100
Lamp survival factor at 4000h	100
Lamp survival factor at 6000h	97
Lamp survival factor at 8000h	94
Lamp survival factor at 12000h	92
Lamp survival factor at 16000h	91
Lamp survival factor at 20000h	86

Electrical characteristics

Rated power	21 W
Input voltage	122,8 Vac
undefined	50 Hz
Dimmable	Yes
Input current	0.189 A
Operating temperature	-15°C / +35°C
Operating position	360°

Spectrometry

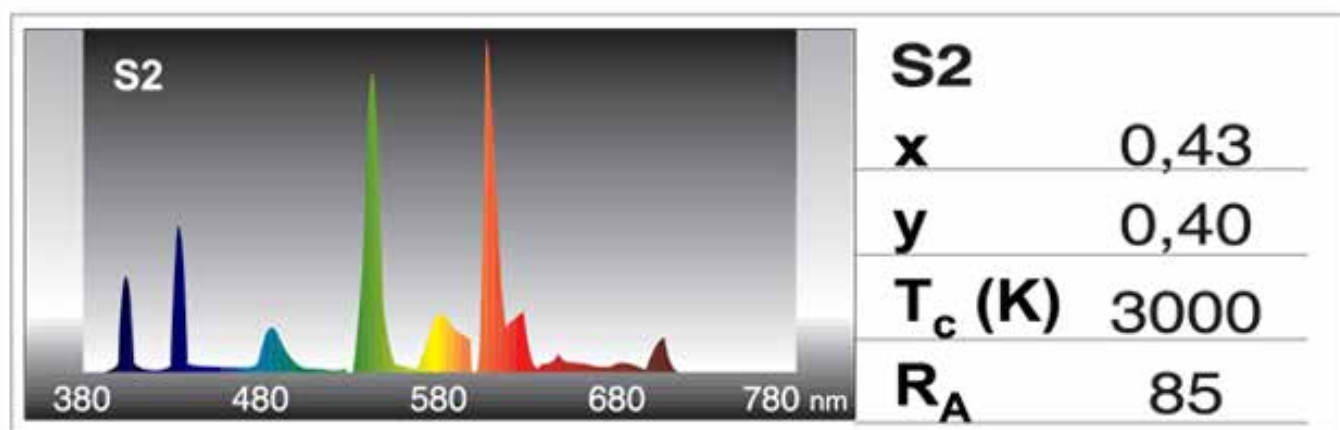

Standards and Directives

2009/125/EC, 245/2009, 347/2010, 1194/2012, 2015/1428, 2010/30/EU, 874/2012, 2011/65/EU, 2012/19/EU, 2014/30/EU, 2014/35/EU, 2015/863	CEI EN 61000-3-2:2019
CEI EN 55015:2020	CEI EN 61000-3-3:2014
CEI EN 60968:2016	CEI EN 61547:2010

Logistics data

Item net weight	79 gr
Barcode single item	8011905322878
Number of pieces multiple pack	25
Barcode multiple pack	8011905748463