




SERIES CAM-Ex
CMP_INT
CODE 270252EX

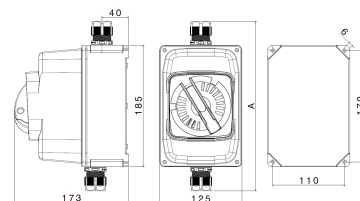

Datasheet

Electrical characteristics

Rated current	25A
Supply Voltage	690V~ 50/60Hz
Poles	2P
Rated insulation voltage	690 V
Insulation Class	I
CAM layout	1
Function Apparatus Control	One way switches
Type of protection	None

Mechanical characteristics

Manufacturing material	Marine aluminium alloy (EN 44300)
Treatment type	Fluorozirconic passivation
Surface finishing	Non-toxic polyester paint anti UV curing in the oven
Color	Black RAL 9005
Execution	Wall mounting
Dimensions	185X125X160 mm
Depth	-
Front-plate dimension	-
Hole type	M25
IP Protection degree	IP66
Additional IPdegree protection	-
Shock resistance	7J (IEC 60079-0)
Resistance to Glow wire	-
Flame rating according UL94	-
Corrosivity category	Equivalent to C5(M)/C4(H) (ISO 12944)
Net Weight	1.65 KG
Working Environment Temp.	Min: -40°C ;Max: +50°C
Warehousing Temperature	Min: -50°C ;Max: +80°C

Technical data switch

Thermal current	25 A
Rated short-circuit current	10 kA
Terminals type	Screw - indirect clamping
Conductors section	Min: 1 mm ² ;Max: 10 mm ²
Terminal tightening torque	2 Nm
Auxiliary status contacts	-
Padlockable handle	3 locks Ø8 mm max
Operating category	

Categoria Rating	Tensione Voltage	Corrente / Potenza Current / Power
AC-22A	230 V	25 A
	400 V	25 A
	500 V	25 A
	690 V	25 A
AC-23A	230 V	25 A
	400 V	25 A
	500 V	25 A
	690 V	25 A
AC-23A	230 V	8.0 kW
	400 V	13.9 kW
	500 V	17.3 kW
	690 V	23.9 kW

Atex characteristics

ATEX application zone	Zona/Zone 2, 21 and 22
Dust Atex execution (Tmax1)	II 2D - Ex tb IIIC T75°C Db
Gas Atex execution (Tmax1)	II 3G - Ex ec nC IIC T5 Gc

Reference Standards and Directives

Certification and approval marks CE, UKCA, IECEx, EX

Directives 2011/65/EU (RoHS), 2012/19/EU (WEEE), 2014/34/EU (ATEX)

Reference Standards EN 60079-15:2010 , EN 60079-31:2014, EN 60079-7:2015, EN 60079-7:2015/A1:2018, EN IEC 60079-0:2018, EN IEC 60947-1:2021, EN IEC 60947-1:2021/AC:2023-01, EN IEC 60947-3:2021, EN IEC 60947-3:2021/AC:2021-11, EN IEC 63000:2018

The images are purely indicative. Palazzoli reserves the right to make changes without notice.