




**SERIES TAIS-MIGNON-Ex
TWO-WAY SWITCH**

CODE 202276EX

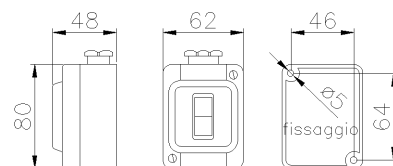

Datasheet

Specifications

Net Weight	242 G
Rated current	16/10A
Frequency	50/60Hz
Protection degree	IP66
Poles	1P
Rated operating voltage	250V~/400V~
Manufacturing material	Thermosetting halogen free
Width	62 mm
Execution	Wall mounting
Insulation Class	II
Dimensions	62X108X48 mm
Hole type	M20
Number of entries in enclosure	1
Rated current/voltage	16A 250V~10A 400V~
DEVICE FUNCTION	Two way switches

Warranties, Reference Standards and Directives

Warranty	1 years
Certification and approval marks	NYCE COLOMBIA, CE, EX
Directives	2011/65/EU (RoHS), 2014/34/EU (ATEX), 2012/19/EU (WEEE), 2014/35/EU (LVD)
Reference Standards	EN 63000:2018, EN 60669-1:1999, EN 60079 31:2014, EN 60669-1:1999/A1:2002, EN 60669-1:1999/A2:2008, EN 60079 0/A11:2013, EN 60669-1/IS1:2009, EN 50581:2012, EN 60079-15:2010, EN 60079 0:2012

Atex characteristics

ATEX application zone	Zona/Zone 2 and 22
Dust ATEX execution	II 3D - Ex tc IIIC T70°C Dc
Gas ATEX execution	II 3G - Ex nR IIC T6 Gc

Note :

The images are purely indicative. Palazzoli reserves the right to make changes without notice.