


MIG 1B/T2

9202T24050GL

TEC-MAR®
LIGHTING





SPECIFIC PRODUCT

Mod	T2
Color	Silver
Installation	Led street light fitting. Pole and wall mountable
Application	Outdoor
Materials	Die cast aluminium body, coated with polyester anticorrosion powder silver color. 4 mm thick tempered transparent glass, silicon gasket
Insulation class	Class II
Protection index	IP66
Impact degree	IK08
Ambient temperature (Ta)	-25 / 45 °C
Optics	High performance PMMA IESNA type II lenses with highway beam. 45° asymmetry
Power supply	220-240Vac
Frequency	50/60Hz
Surge protection	10kv
Led modules	Removable (Class: D)
Standard equipment	<ul style="list-style-type: none">- 60 mm diameter painted adjustable pole bracket.- 800 mm long H07RN-F neoprene cable.
Luminous flux maintenance	L90-B10 > 100.000 h
Wiring	Removable
Step Mac Adams	3 step
Photobiological safety class	Risk exempt group
Trademarks and certifications	CE / UNI EN 60598-1
Warranty	7 years

PRODUCT FEATURES

W tot.	mA	°K - CRI	Options	Lumen OUTPUT	Lm/W	A (mm)	B (mm)	C (mm)	D (mm)	Kg
50	-	4000°K - CRI>70	on/off	7495	150	245	415	60	-	4.5



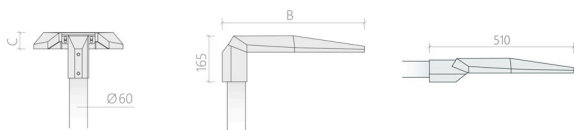

RELATED ACCESSORIES



ACC069

IP66 waterproof connector, e 2P + E (16A - 400V).



ACC112

Streetlights half-pole bracket, silver color. Pole diameter: 60 mm.



ACC113

Streetlights adjustable wall bracket, silver color.



ACC196

Double top-pole bracket. Diameter 60 mm.



ACC244

Streetlights double half-pole bracket, silver color. Pole diameter: 60 mm.

TEC-MAR
LIGHTING

TEC-MAR S.r.l. Via delle Industrie 1, 26835 Crespiatica (LO) – Italy

TEC-MAR S.r.l. reserves the right, without notice, to modify the characteristics of its products as well as their availability at any time. All products, related technical data, illustrations and information are not binding for TEC-MAR S.r.l. TEC-MAR S.r.l. will not be liable for any illustrative, textual and/or translation errors. All values reported are measurement values. Flow, CCT and power data are within tolerances of +/- 10%.

01-06-2024