
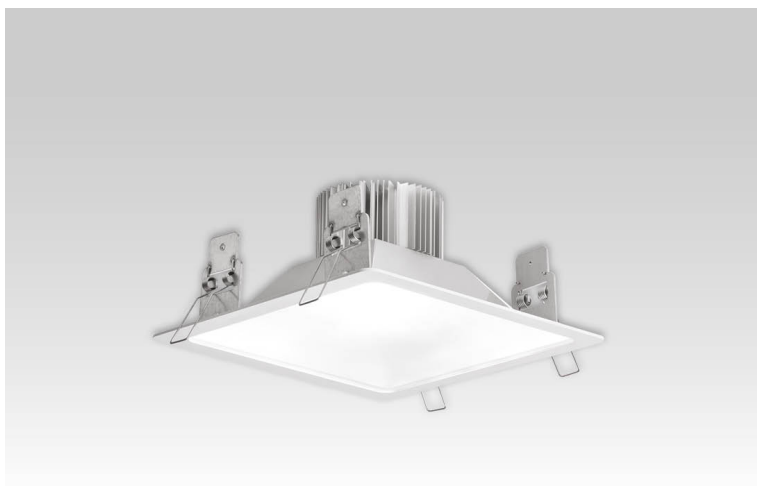





art. 6002 EOS/24

Mod	24	Insulation class	Class II
Material	Steel sheet frame, painted with embossed white anti-yellowing epoxy-polyester powder, including phosphating and degreasing pretreatment.	Installation	Square downlight suitable for all false ceiling types.
Protection index	IP40	Impact degree	IK07
Ambient temperature (Ta)	-25 / +45 °C	Optics	Metalised aluminium reflector, anti-glare microprismatic polycarbonate diffuser
UGR	less than 19	Power supply	220-240Vac 50/60Hz
Flicker	Low Flicker (less than 10%)	Trademarks and certifications	CE / UNI EN 60598-1:2015 - IMQ
Warranty	7 YEARS	Luminous flux maintenance	L90-B10 (50.000h)-L80-B50 (75.000h)
Photobiological safety class	IEC 62471: Exempt group	Beam angle	90°

CODING

Art.	+	Mod.	+	°K	+	W-tot.	+	+	Opt.			
6002		24		03	=3000°K-CRI80	65	=6500°K-CRI80	11	20	40	EL	= standard
				04	=4000°K-CRI80	94	=4000°K-CRI80	13	26	55	LM	= 1-10 V
				05	=5000°K-CRI80	93	=3000°K-CRI90	18	30	75	LD	= dali
ACCESSORIES				Acc.017		Acc.035						
											D1	=dali+em. 1h
											E1	=em. 1h
											E3	=em. 3h

PERFORMANCE

W-tot	°K-CRI	n° Led	REPLACE	LUMEN LED	LUMEN OUTPUT	Lm/W	A(mm)	B(mm)	C(mm)	Kg
11	4000K-CRI>80	1	1x26WFL-C	1880	1353	123	240	240	90	1,2
13	4000K-CRI>80	1	1x26WFL-C	2260	1627	125	240	240	90	1,2
18	4000K-CRI>80	1	1X26W FL-C	3192	2298	128	240	240	90	1,2
20	4000K-CRI>80	1	2X26W FL-C	3299	2375	119	240	240	90	1,2
26	4000K-CRI>80	1	2X26W FL-C	4395	3164	122	240	240	90	1,2
30	4000K-CRI>80	1	70W JM	4038	2907	97	240	240	90	1,2
40	4000K-CRI>80	1	400W ALO	6389	4600	115	240	240	90	1,2
55	4000K-CRI>80	1	500W ALO	8336	6001	109	240	240	90	1,2
75	4000K-CRI>80	1	150W JM	10648	7666	102	240	240	90	1,2

The luminous flux and the total power absorbed by the system have a tolerance of $\pm 10\%$ with respect to the indicated values.

- 3000K - CRI80 = -4,5% lm
- 3000K - CRI90 = -19,9% lm
- 4000K - CRI80 = standard
- 4000K - CRI90 = -13,73% lm

