


ZOE/B3

7012B34020EL

TEC-MAR®
LIGHTING




SPECIFIC PRODUCT

Mod	B3
Color	Matt white
Installation	Indoor and outdoor led fitting for ceiling or wall installation
Application	Indoor, Outdoor
Materials	Body in selfextinguishing matt white polycarbonate, silicone gasket with quick closure
Insulation class	Class II
Protection index	IP66
Impact degree	IK09
Ambient temperature (Ta)	'-25 / 45 °C
Optics	120° extra-wide beam diffuser in anti-glare satin opal polycarbonate with high flux efficiency. Body in matt white polycarbonate
Beam angle	120°
Power supply	220-240Vac
Frequency	50/60Hz
Led modules	Removable (Class: D)
Standard equipment	- AC direct. - Phase cut dimming.
Luminous flux maintenance	L80-B50 > 100.000 h L90-B10 > 60.000 h
Wiring	Removable
Step Mac Adams	3 step
Photobiological safety class	Risk exempt group
Trademarks and certifications	CE / UNI EN 60598-1
Warranty	7 years

PRODUCT FEATURES

W tot.	mA	°K - CRI	Options	Lumen OUTPUT	Lm/W	A (mm)	B (mm)	C (mm)	D (mm)	Kg
20	-	4000°K - CRI>80	on/off	2021	101	280	-	55	62	0.9

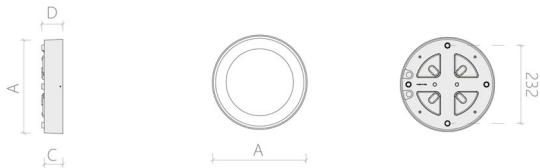

RELATED ACCESSORIES



ACC241
Universal dimmer with
230Vac phase cut output.



ACC271
45° installation wall
bracket white color.

TEC-MAR
LIGHTING

TEC-MAR S.r.l. Via delle Industrie 1, 26835 Crespiatica (LO) – Italy
TEC-MAR S.r.l. reserves the right, without notice, to modify the characteristics of its products as well as their availability at any time. All products, related technical data, illustrations and information are not binding for TEC-MAR S.r.l. TEC-MAR S.r.l. will not be liable for any illustrative, textual and/or translation errors. All values reported are measurement values. Flow, CCT and power data are within tolerances of +/- 10%.

02-07-2024