


MAGIC 2/AR

7102AR4900GL

TEC-MAR®
LIGHTING

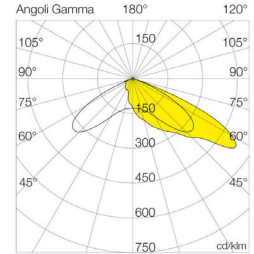


SPECIFIC PRODUCT

Mod	AR
Color	Silver
Installation	Indoor and outdoor led floodlight, with floor, wall and pole mounting
Application	Indoor, Outdoor
Materials	Die cast aluminium body, coated with polyester anticorrosion powder, silver color
Insulation class	Class I
Protection index	IP66
Impact degree	IK08
Ambient temperature (Ta)	-25 / 45 °C
Optics	65° asymmetric width beam, in high performance PMMA lenses
Beam angle	65°
Power supply	220-240Vac
Frequency	50/60Hz
Surge protection	10kv
Led modules	Removable (Class: D)
Standard equipment	<ul style="list-style-type: none">- 2000 mm long H07RN-F 2x1,5 mm² neoprene cable with waterproof connector and remote driver up to 40 m.- Thermal protection integrated in the driver.
Windage	0,256 m2
Luminous flux maintenance	L90-B10 > 100.000 h
Wiring	Removable
Step Mac Adams	3 step
Photobiological safety class	Risk exempt group
Trademarks and certifications	CE / UNI EN 60598-1
Warranty	7 years

PRODUCT FEATURES

W tot.	mA	°K - CRI	Options	Lumen OUTPUT	Lm/W	A (mm)	B (mm)	C (mm)	D (mm)	Kg
900	-	4000°K - CRI>70	on/off	126151	140	655	350	550	-	21.5

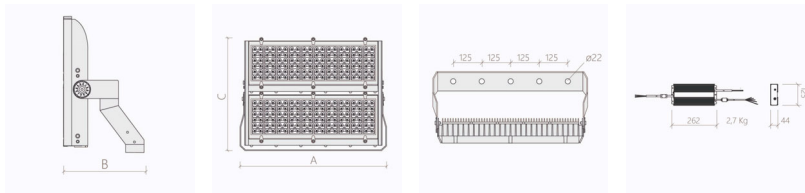

RELATED ACCESSORIES



ACC136
4x32 aiming scope for projectors.

ACC137
Day and night aiming laser for projectors.

ACC168
Fixing plate for remote drivers on the bracket.