


# POLAR 3/PR

7028PR4190GL

**TEC-MAR®**  
LIGHTING




## SPECIFIC PRODUCT

Mod	PR
Color	Silver
Installation	Indoor and outdoor led floodlight, with floor, wall, pole and ceiling mounting
Application	Indoor, Outdoor
Materials	Die cast aluminium body, coated with polyester anticorrosion powder, silver color. 4 mm thick tempered transparent glass, silicon gasket
Insulation class	Class I
Protection index	IP66
Impact degree	IK08
Ambient temperature (Ta)	-25 / 45 °C
Optics	90° wide beam matt satin aluminium reflector
Beam angle	90°
Power supply	220-240Vac
Frequency	50/60Hz
Surge protection	10kv
Led modules	Removable (Class: D)
Standard equipment	<ul style="list-style-type: none"><li>- 1000 mm long H07RN-F 3x1mm² neoprene cable.</li><li>- Cable gland with integrated anticondensation valve.</li></ul>
Windage	0,126 m2
Luminous flux maintenance	L90-B10 > 100.000 h
Wiring	Removable
Step Mac Adams	3 step
Photobiological safety class	Risk exempt group
Trademarks and certifications	CE / UNI EN 60598-1
Warranty	7 years

## PRODUCT FEATURES

W tot.	mA	°K - CRI	Options	Lumen OUTPUT	Lm/W	A (mm)	B (mm)	C (mm)	D (mm)	Kg
190	-	4000°K - CRI>80	on/off	28668	151	295	55	425	-	5.6

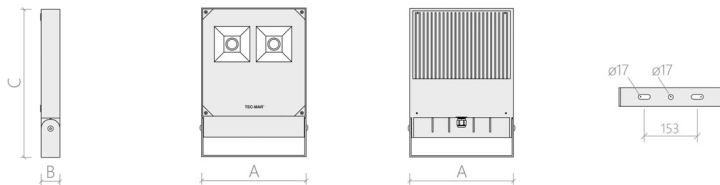


# RELATED ACCESSORIES



**ACC069**  
IP66 waterproof connector, 2P + E (16A - 400V).



**ACC071**  
IP66 waterproof connector, 4P + E (16A - 400V).



**ACC140**  
Chromed steel 370 x 280 mm protection grid.



**ACC160**  
Bracket with marine treatment resistant to salt fog.



**ACC215**  
Floodlights pole bracket. Installation: top-pole, double top-pole, half pole and dable half-pole. Silver color.



TEC-MAR S.r.l. Via delle Industrie 1, 26835 Crespiatica (LO) – Italy  
TEC-MAR S.r.l. reserves the right, without notice, to modify the characteristics of its products as well as their availability at any time. All products, related technical data, illustrations and information are not binding for TEC-MAR S.r.l. TEC-MAR S.r.l. will not be liable for any illustrative, textual and/or translation errors. All values reported are measurement values. Flow, CCT and power data are within tolerances of +/- 10%.

21-07-2024